

Elevadores fijos Fixed Pool Lifts F 145 - F 145 /B

- Certificaciones y Patentes – Certifications and Patent**
- Directive 93/42/CEE - Medical Device - DM 321258/R
 - Directive 2006/42/CE - Machine Directive
 - Directive 2004/108/EC - EMC Electromagnetic Compatibility

ELEVADORES FIJOS / FIXED POOL LIFTS




Elevador fijo F 145 - F 145 B

El elevador fijo **F145/F145B** permite, a través de su estructura, anclarse al suelo a través de una placa con tacos de fijación o la placa incrustados en el bloque de hormigón de dimensiones 60x60x60 cm. El elevador se adapta perfectamente a las piscinas elevadas. La versión **F145B** se adapta a piscinas tradicionales desbordantes, con skimmer o incluso a otras situaciones especiales como embarcaciones. El elevador puede ser equipado de un asiento móvil e independiente, un arnés o incluso alguna estructura personalizada.

Fixed Pool Lift F 145 - F 145 B

The **F145** poolside lift can be fixed to the floor by means of its standard socket to be fixed by pins or by means of a socket to be concreted into the floor. In both cases the ground has to be prepared with a concrete block of 60x60x60 cm. This pool lift is recommended for any type of walled pool. There is also a shorter version, **F145B**, which is suitable for skimmer or ground deck pools. It can also be used for boats, docks etc. This poolside lift can be equipped with a seat-transporter or a sling or other customized devices.

Dimensiones Measurements

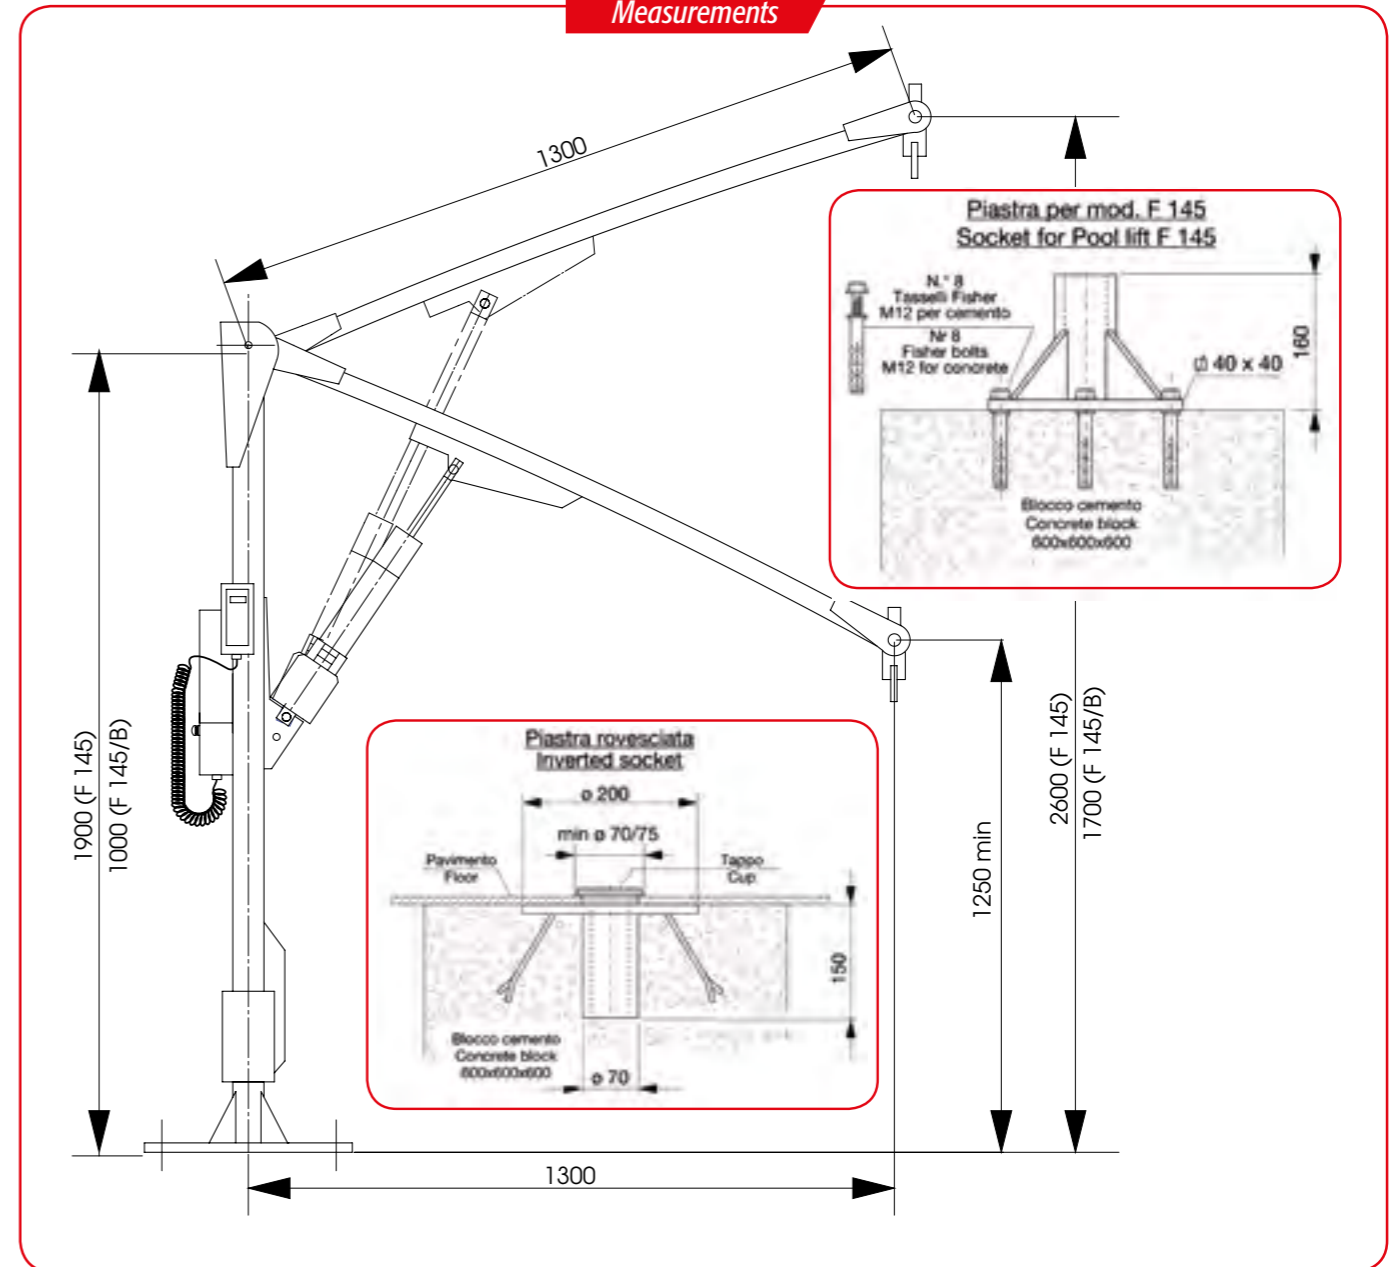

Datos/materiales/equipos

Capacidad máxima de elevación	140 kg
Desplazamiento máximo del brazo	1350 mm
Tiempo para bajada con carga	40 seg.
Tiempo para subida con carga	40 seg.
Peso total	63 kg
Batería	24 V
Tensión	2 V
Circuito de control eléctrico	
Cargador de batería externo	
Rotación	360°
Plancha de fijación mural	40 x 40 cm.
Estructura de acero con galvanización y pintura en polvo	
MANDO A DISTANCIA	

Features/Materials/Equipment

Maximum capacity	140 kg
Max. arm travel	1350 mm
Time of Down-lifting with weight	40 sec
Time of Up-lifting with weight	40 sec
Total weight	63 kg
Battery	24 V
Power	12 V
Electric box	
External battery charger	
Rotation	360°
Floor fixing plate	40 x 40 cm
Steel structure: zinc coated and powder finished	
REMOTE CONTROL	

INFRASTRUCTURE SOLUTIONS